




SLOAN
METAL SOLUTIONS

TRUSTED SINCE 1991

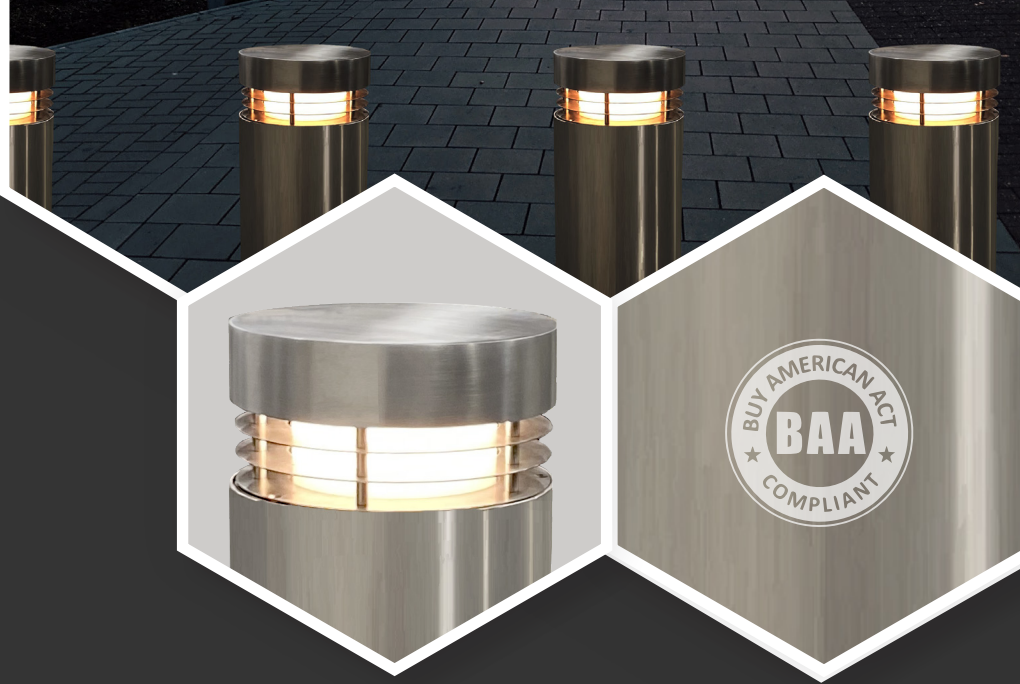

Lighted Bollard Covers

- ✓ Stainless Steel
- ✓ Vandal Protected
- ✓ Multiple Options



Ideal for Pedestrian Walkways



- ✓ Vandal Protected Acrylic Lens
- ✓ Corrosion-Resistant Stainless Steel
- ✓ Replacement Parts Available
- ✓ Up to 50 Lights on a Circuit
- ✓ Strong Enough to be a Bollard

120V
VOLTS


9W
WATTS



You Choose

1

Lens Height

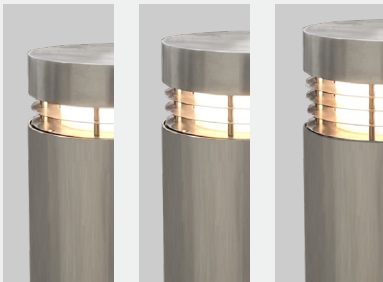

- 2"
- 3"
- 4"

2

Spacer Height



- 1"
- 2"

3

Cover Diameter

- to cover 10 3/4" OD Bollard
- to cover 8 5/8" OD Bollard
- to cover 6 5/8" OD Bollards

4

Cover Height*

 Inches

*Standard & Custom Heights Available

Features & Specs

Bollard Height	- 6" over the top of the fixed bollard for a 2" light lens area - 7" over the top of the fixed bollard for a 3" light lens area - 8" over the top of the fixed bollard for a 4" light lens area
Diameter/Thickness	- 12 3/4" OD X .125" wall thickness for a 10 3/4" OD bollard - 10 3/4" OD. X .125" wall thickness for an 8 5/8" OD bollard - 8 5/8" OD X .125" wall thickness for a 6 5/8" OD bollard

Steel	304 Stainless Steel
Finish	Horizontal Grain - #4, #6 Polish, Powder Coated
ASTM	ASTM A967 Standard (Chemical Passivation)
Mounting	Set screws or wet set in concrete or epoxy
Lighting	35,000 hours lifespan (9 Watts at 120 Volts)

