

SLOAN FIXED BOLLARD M30/P1


SET & POUR BOLLARD - MODEL FB-2030

CRASH TESTED TO ASTM F2656-07 - M30/P1 RATED - STOPS 15,000 LB. VEHICLE AT 30 MPH IMPACT

TYPICAL SINGLE BOLLARD INSTALLATION

KEY FEATURES:

1. PREFABRICATED BOLLARD UNIT
2. NO REBAR IN FOUNDATION
3. BOLLARD SYSTEM CAN ACCOMMODATE ANY TURNING RADIUS

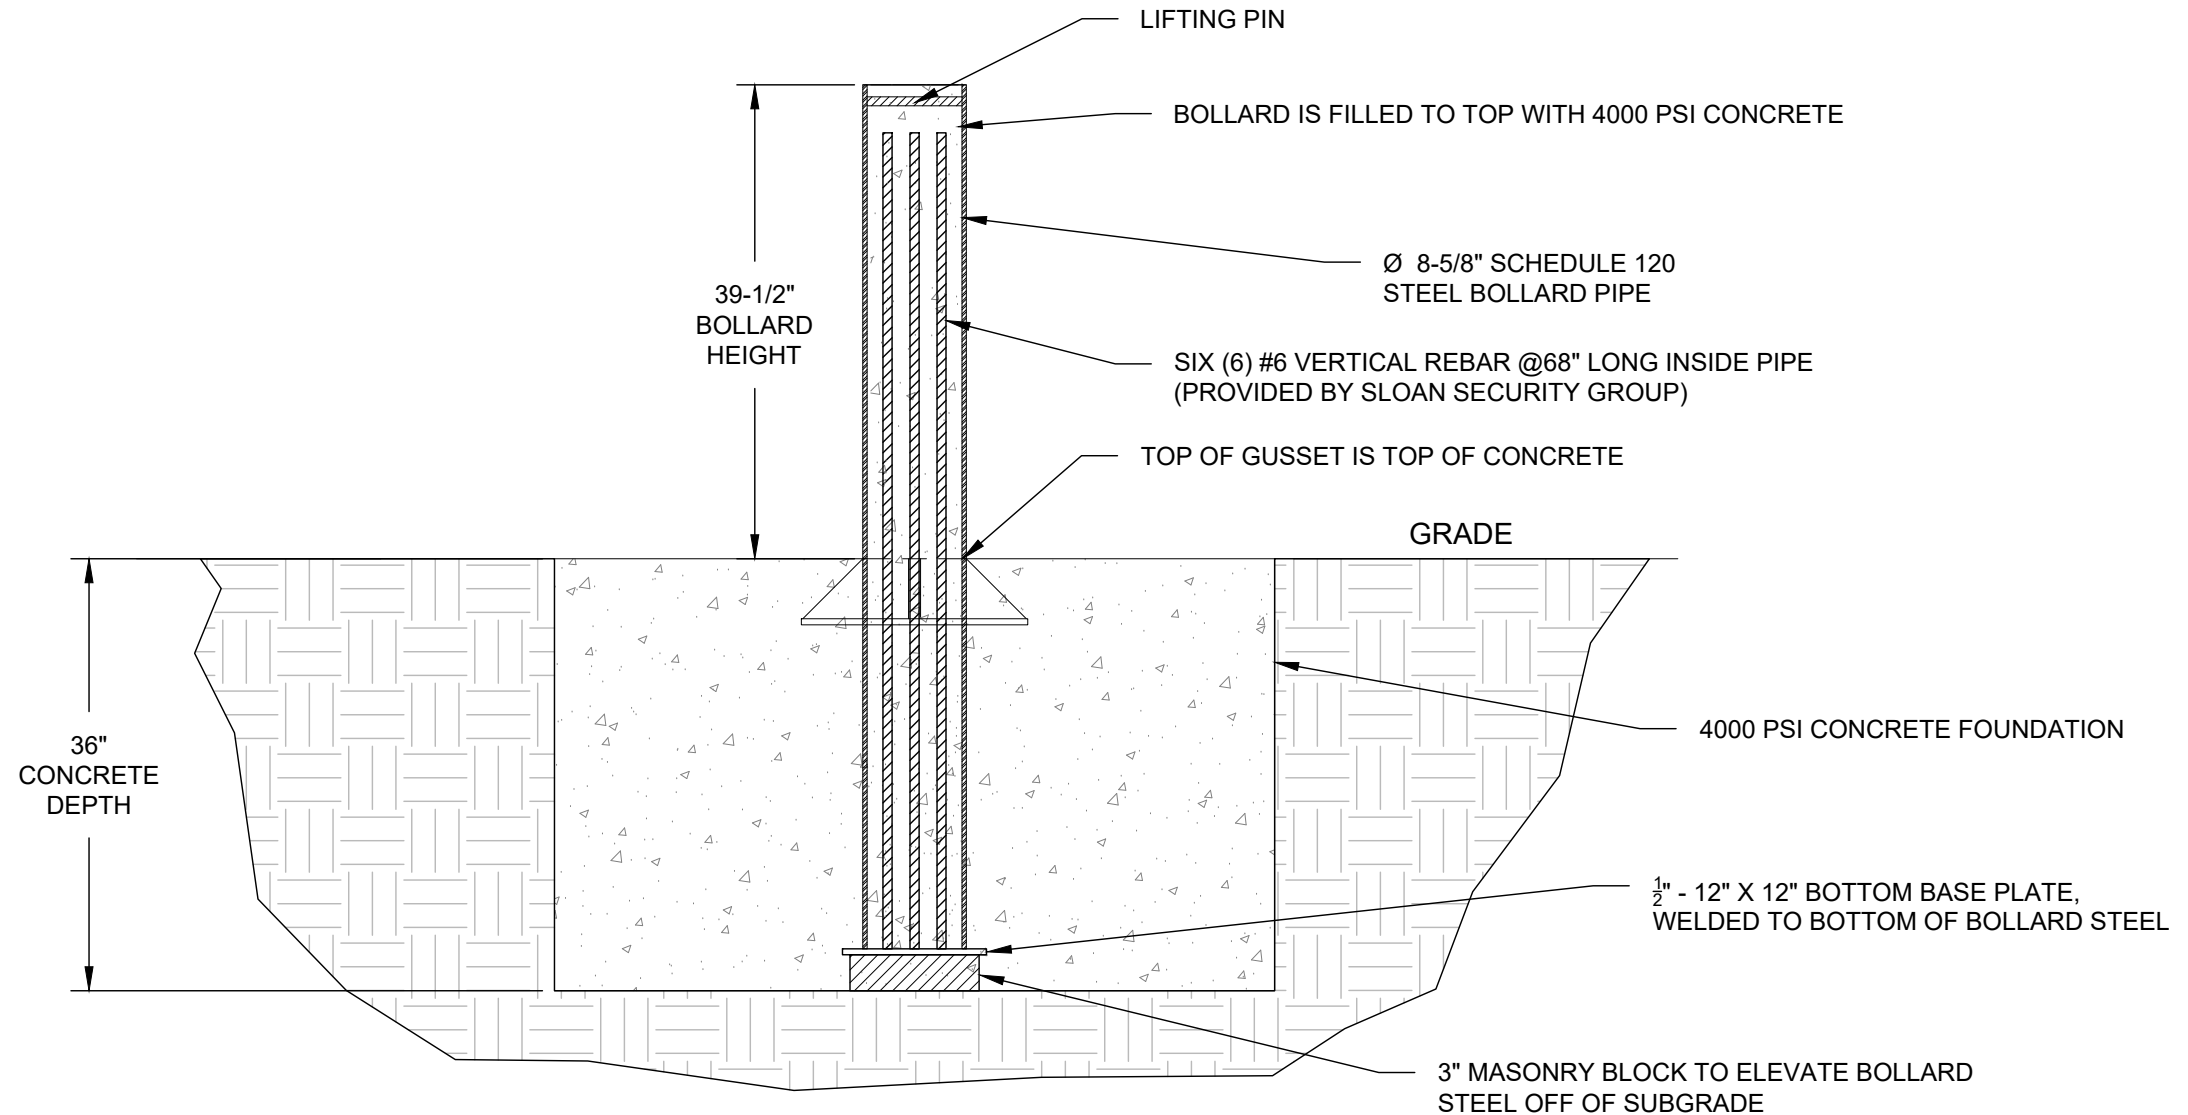

SLOAN SECURITY GROUP

6828 W MELROSE ST
BOISE, ID 83709
1 (800) 275-5998 www.sloansg.com

PATENT PROTECTED

THE DRAWINGS AND INFORMATION CONTAINED HEREIN ARE PROPRIETARY AND CONFIDENTIAL. ALL RIGHTS RESERVED

ELEVATION VIEW
(STAND-ALONE)

FB-2030
SUBMITTAL DRAWING

SHEET: 1 OF 6

20230227-10-M


SCALE: N.T.S.

SLOAN FIXED BOLLARD M30/P1

SET & POUR BOLLARD - MODEL FB-2030

CRASH TESTED TO ASTM F2656-07 - M30/P1 RATED - STOPS 15,000 LB. VEHICLE AT 30 MPH IMPACT

TYPICAL SINGLE BOLLARD INSTALLATION

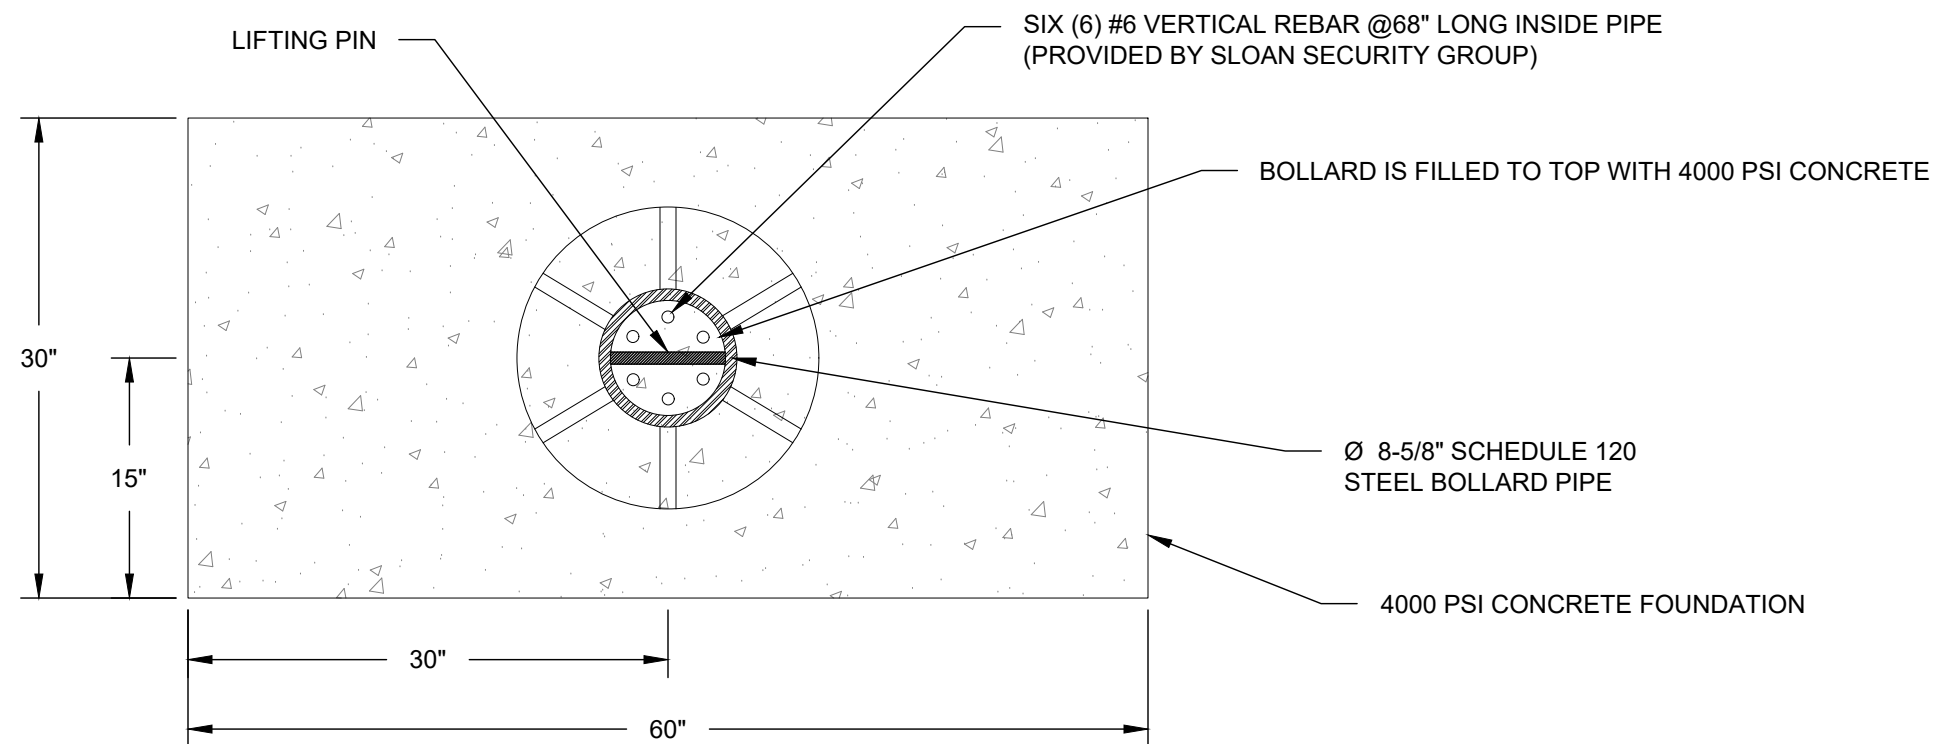

SLOAN SECURITY GROUP

6828 W MELROSE ST
BOISE, ID 83709
1 (800) 275-5998 www.sloansg.com

PATENT PROTECTED

THE DRAWINGS AND INFORMATION CONTAINED HEREIN ARE PROPRIETARY AND CONFIDENTIAL. ALL RIGHTS RESERVED

PLAN VIEW
(STAND-ALONE)

FB-2030
SUBMITTAL DRAWING

SHEET: 2 OF 6

20230227-10-M

SCALE: N.T.S.

SLOAN FIXED BOLLARD M30/P1


SET & POUR BOLLARD - MODEL FB-2030

CRASH TESTED TO ASTM F2656-07 - M30/P1 RATED - STOPS 15,000 LB. VEHICLE AT 30 MPH IMPACT

TYPICAL BOLLARD ARRAY INSTALLATION

KEY FEATURES:

1. PREFABRICATED BOLLARD UNIT
2. NO REBAR IN FOUNDATION
3. BOLLARD SYSTEM CAN ACCOMMODATE ANY TURNING RADIUS

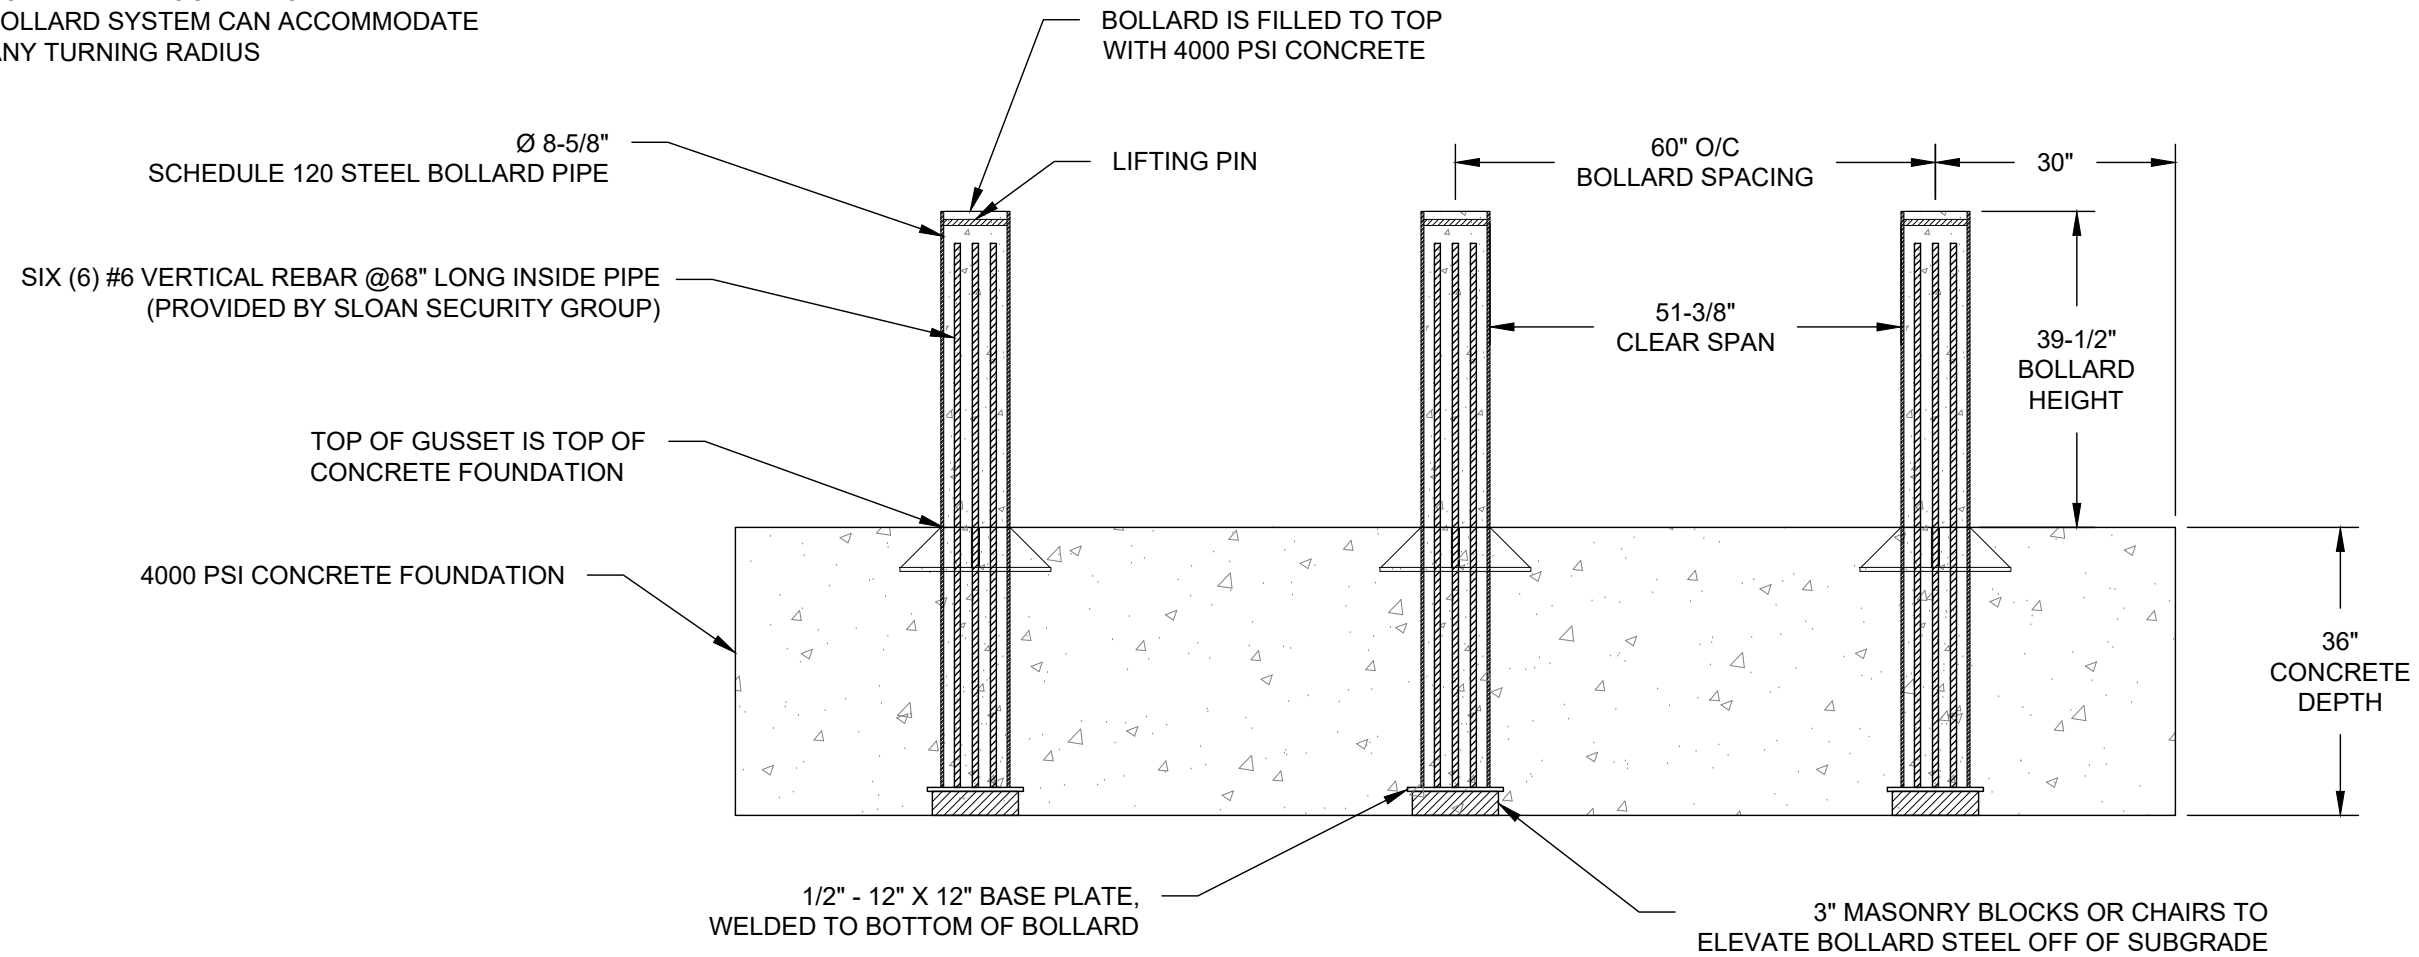

NOTE:

1. MODIFIED SPACING FOR SITE SPECIFIC CONDITIONS AVAILABLE.



SLOAN SECURITY GROUP

6828 W MELROSE ST
BOISE, ID 83709
1 (800) 275-5998 www.sloansg.com

PATENT PROTECTED

THE DRAWINGS AND INFORMATION CONTAINED HEREIN ARE PROPRIETARY AND CONFIDENTIAL. ALL RIGHTS RESERVED

ELEVATION VIEW
(ARRAY)

FB-2030
SUBMITTAL DRAWING

SHEET: 3 OF 6

20230227-10-M


SCALE: N.T.S.

SLOAN FIXED BOLLARD M30/P1

SET & POUR BOLLARD - MODEL FB-2030

CRASH TESTED TO ASTM F2656-07 - M30/P1 RATED - STOPS 15,000 LB. VEHICLE AT 30 MPH IMPACT

TYPICAL BOLLARD ARRAY INSTALLATION

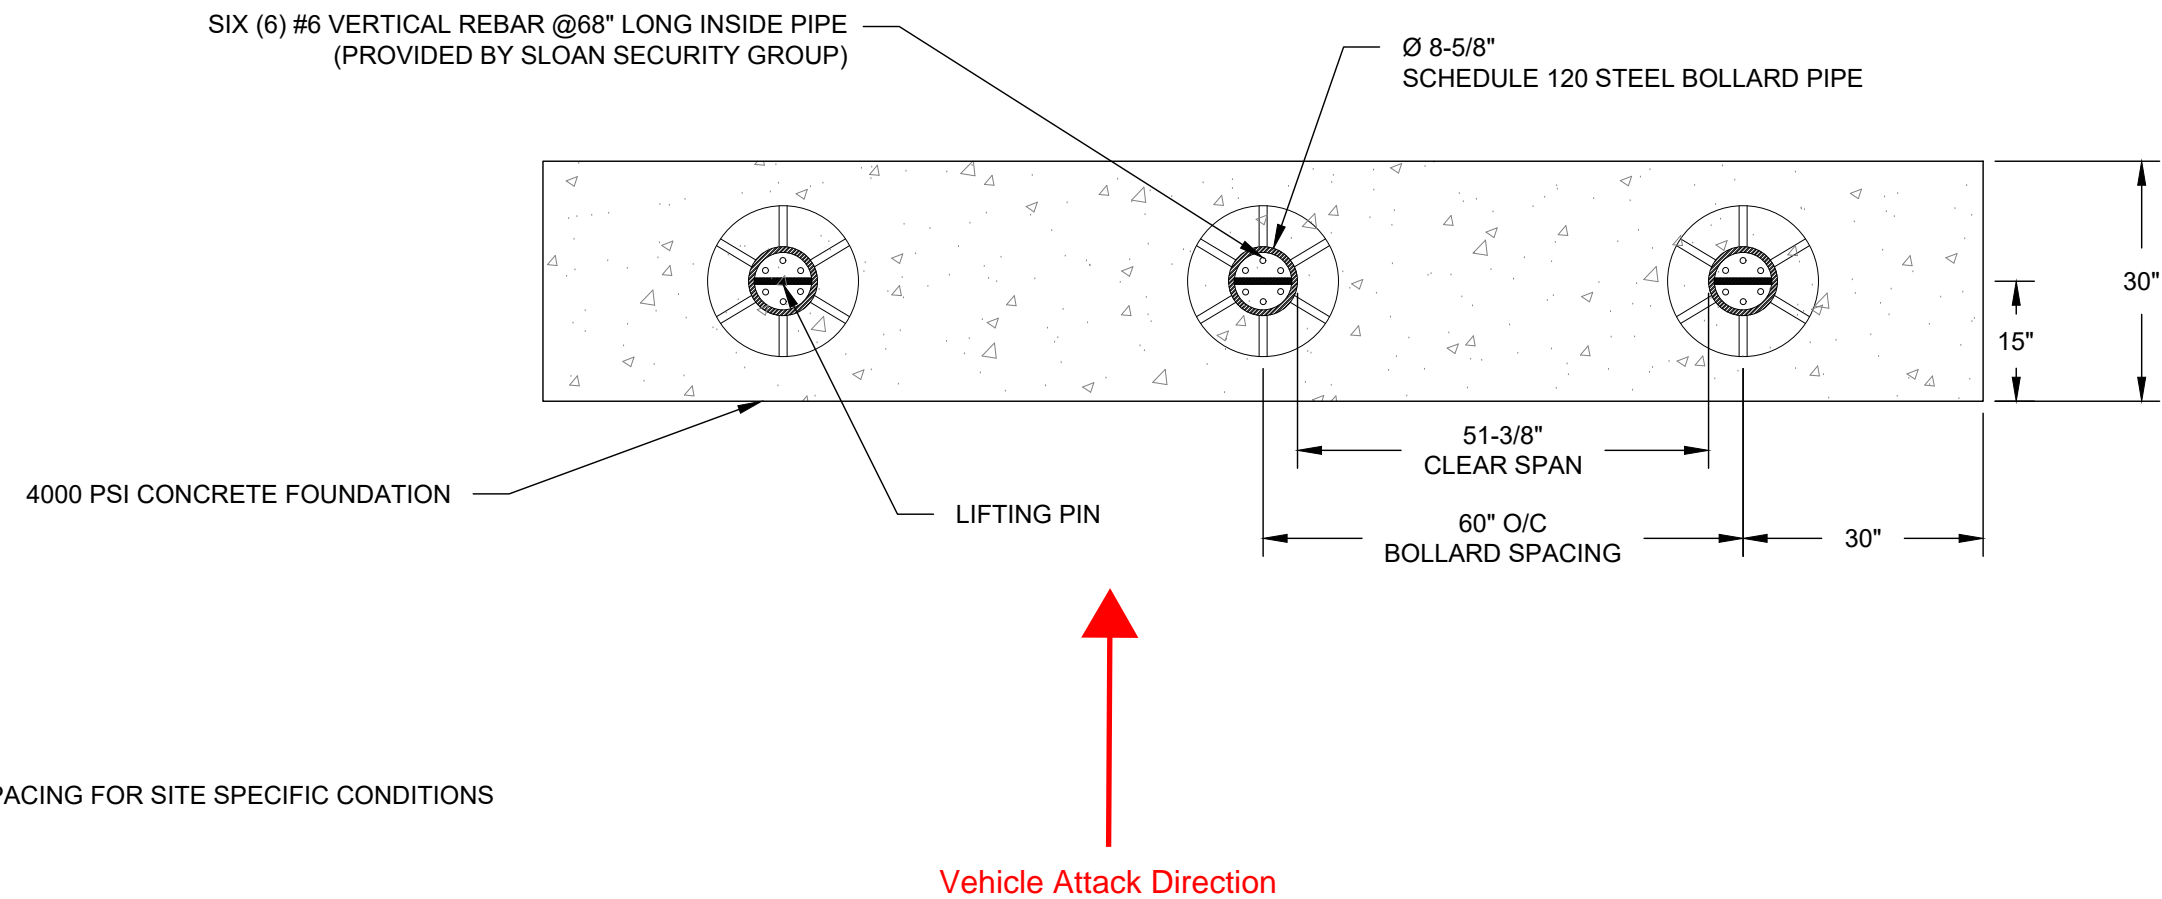

NOTE:
1. MODIFIED SPACING FOR SITE SPECIFIC CONDITIONS AVAILABLE.



SLOAN SECURITY GROUP

6828 W MELROSE ST
BOISE, ID 83709
1 (800) 275-5998 www.sloansg.com

PATENT PROTECTED

THE DRAWINGS AND INFORMATION CONTAINED HEREIN ARE PROPRIETARY AND CONFIDENTIAL. ALL RIGHTS RESERVED

PLAN VIEW
(ARRAY)

FB-2030
SUBMITTAL DRAWING

SHEET: 4 OF 6

20230227-10-M

SCALE: N.T.S.

SLOAN FIXED BOLLARD M30/P1


SET & POUR BOLLARD - MODEL FB-2030

CRASH TESTED TO ASTM F2656-07 - M30/P1 RATED - STOPS 15,000 LB. VEHICLE AT 30 MPH IMPACT

MATERIALS PROVIDED

PREFABRICATED BOLLARD MATERIALS PROVIDED BY SLOAN SECURITY

STANDARD FINISH:
BLACK PAINT



(QTY 1) EACH:
BOLLARD ASSEMBLY



(QTY 6) EACH:
PRE-CUT #6 VERTICAL REBAR
@ 68" LONG
(PLACED INSIDE BOLLARD)

MATERIALS PROVIDED BY INSTALLER

1. CONCRETE, ABOUT 1.5 CUBIC YARDS PER BOLLARD
2. MASONRY BLOCKS OR CHAIRS TO ELEVATE BOLLARDS OFF OF SUBGRADE



SLOAN SECURITY GROUP

6828 W MELROSE ST
BOISE, ID 83709
1 (800) 275-5998 www.sloansg.com

PATENT PROTECTED

**THE DRAWINGS AND INFORMATION CONTAINED HEREIN ARE PROPRIETARY
AND CONFIDENTIAL. ALL RIGHTS RESERVED**

MATERIALS
PROVIDED

FB-2030
SUBMITTAL DRAWING

SHEET: 5 OF 6

20230227-10-M

SCALE: N.T.S.

SLOAN FIXED BOLLARD M30/P1

SET & POUR BOLLARD - MODEL FB-2030

CRASH TESTED TO ASTM F2656-07 - M30/P1 RATED - STOPS 15,000 LB. VEHICLE AT 30 MPH IMPACT

INSTALLATION STEPS


① EXCAVATE THEN TAMP SUBGRADE WITH PLATE TAMPER.

② USE MASONRY BLOCK OR CHAIRS TO ELEVATE BOLLARD OFF SUBGRADE, SO THAT TOP OF GUSSET / SLEEVE IS SAME HEIGHT AS TOP OF CONCRETE.

③ PLACE PREFABRICATED BOLLARDS INTO EXCAVATION.

④ INSERT VERTICAL REBAR INTO BOLLARD TUBE.

⑤ FILL BOLLARD TUBE AND EXCAVATION WITH CONCRETE.

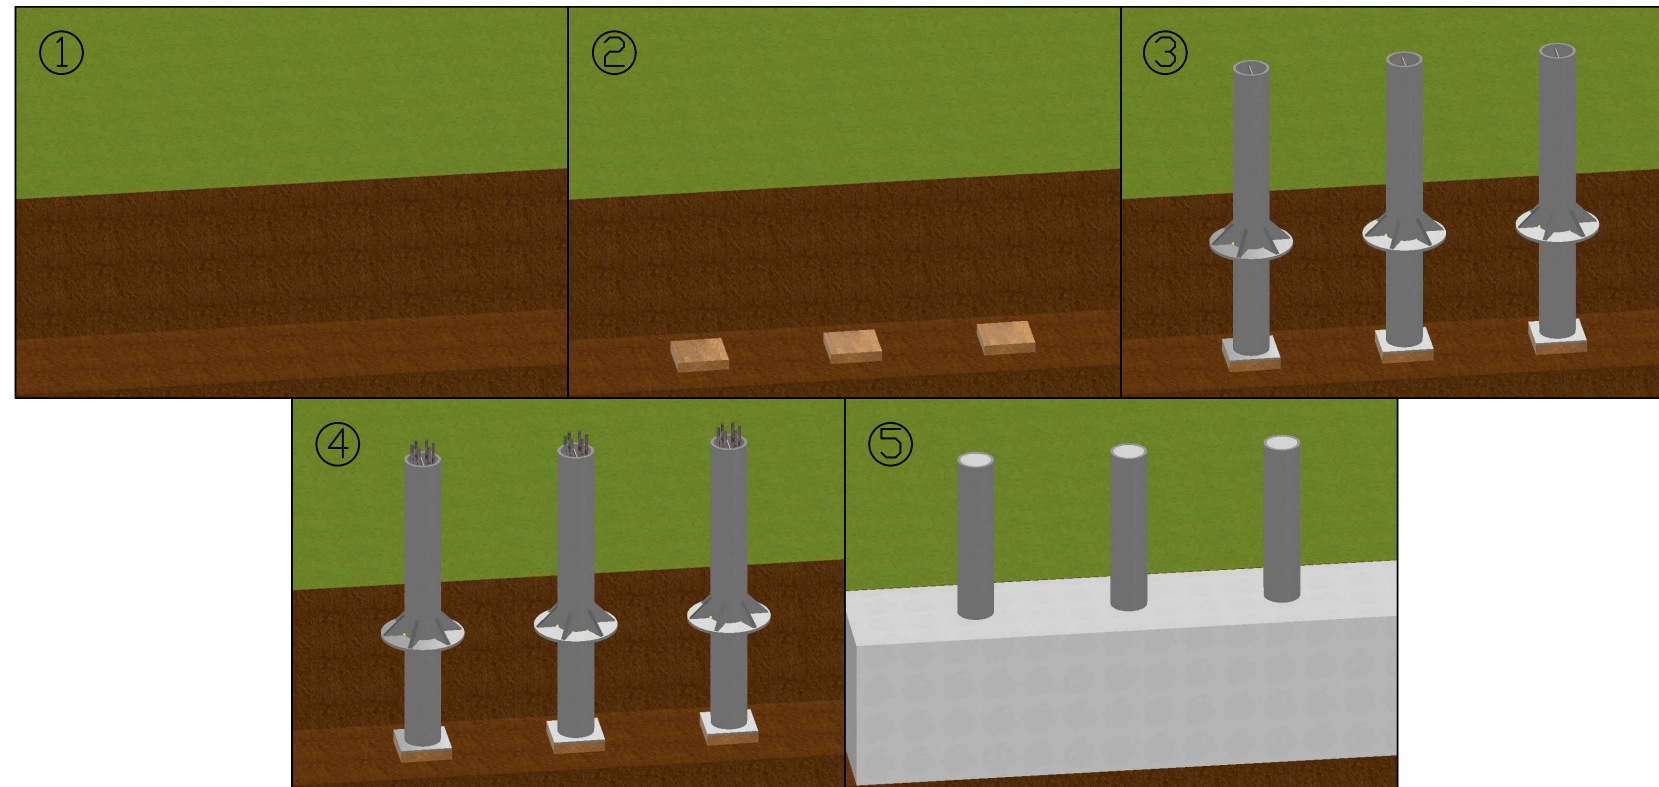

SLOAN SECURITY GROUP

6828 W MELROSE ST
BOISE, ID 83709
1 (800) 275-5998 www.sloansg.com

PATENT PROTECTED

THE DRAWINGS AND INFORMATION CONTAINED HEREIN ARE PROPRIETARY AND CONFIDENTIAL. ALL RIGHTS RESERVED

INSTALLATION STEPS

FB-2030
SUBMITTAL DRAWING

SHEET: 6 OF 6

20230227-10-M

SCALE: N.T.S.